


Grundmodelle




<b>OT.60</b>	OT.60.1	OT.60.2	OT.60.3	OT.60.4	OT.60.5
<b>OT.40</b>	OT.40.1	OT.40.2	OT.40.3	OT.40.4	OT.40.5

Mit Lichtausschnitten

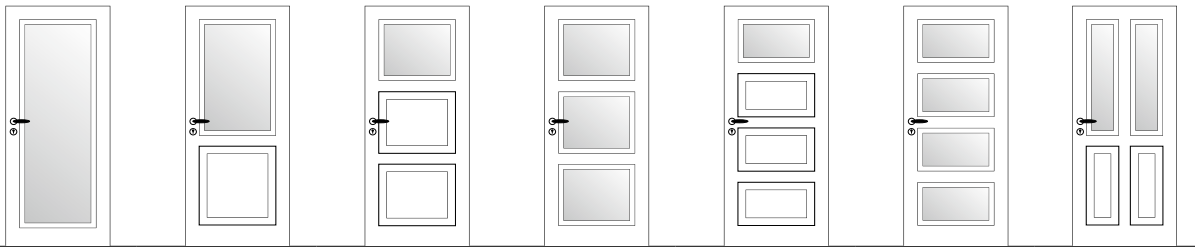

<b>OT.60</b>	OT.60.1 LA	OT.60.2 LA	OT.60.3 LA 1	OT.60.3 LA 3	OT.60.4 LA 1	OT.60.4 LA 4	OT.60.5 LA 2
<b>OT.40</b>	OT.40.1 LA	OT.40.2 LA	OT.40.3 LA 1	OT.40.3 LA 3	OT.40.4 LA 1	OT.40.4 LA 4	OT.40.5 LA 2

Merkmale

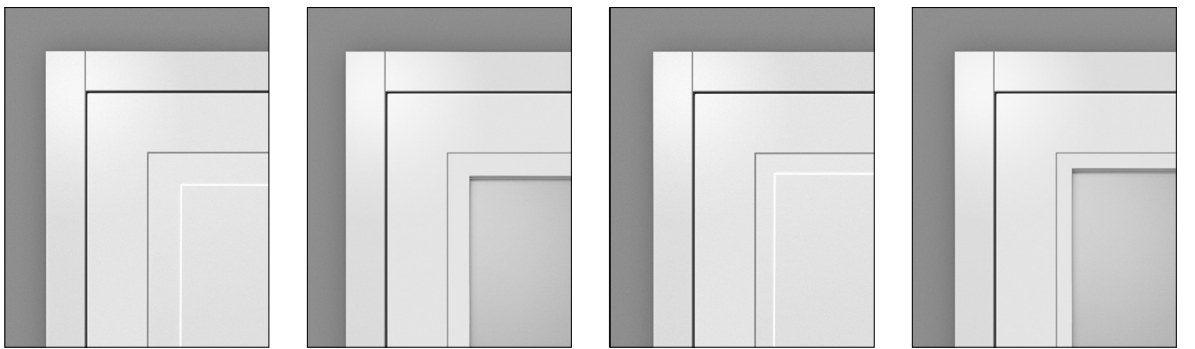

**OT.60** – das Profil (60 mm)      **OT.60** – die Glasleiste (40 mm)      **OT.40** – das Profil (40 mm)      **OT.40** – die Glasleiste (25 mm)

- Fräsung: Tiefe 4 mm,  
Breite Profil: **OT.60**: 60 mm, Breite Glasleiste: **OT.60** LA 35 mm  
Breite Profil: **OT.40**: 40 mm, Breite Glasleiste: **OT.40** LA 25 mm
- korrespondierendes Leistenbild bei Lichtausschnitten
- Glasrahmen aus einem Stück gefräst
- gefälzt oder stumpf mit verdeckten Bändern
- gerader Überschlag, Kanten gebrochen
- passende Zargen: E, S 70, duo 55, duo 70, duo 90

Passende Zarge



Zarge E



Zarge S 70



Zarge duo 55



Zarge duo 70



Zarge duo 90